Turn
-N-
Press
technology ™

Experience effortless control from your hot tub seat with our user-friendly Turn-N-Press keypad.

98°F

temperature

flx.go

The easiest way to control your hot tub
Featuring a seamlessly designed dial ring that ensures flawless operation. Its universal size means anyone can effortlessly take control, making relaxation simpler than ever before. Say goodbye to complicated controls and hello to the effortless luxury of the flx.go.

A simplified high-resolution experience
Navigate with ease, regardless of hand size. With clear, easily discernible icons, users of all ages can enjoy clear visibility on the screen. Embrace the simplicity and an intuitive design without compromising on quality.

A world of possibilities
Built to excel in any condition and designed for seamless integration inside the spa. The flx.go offers an elevated experience like no other. A pioneering feat in the industry, it redefines convenience and accessibility, ensuring every user enjoys unparalleled comfort and control.
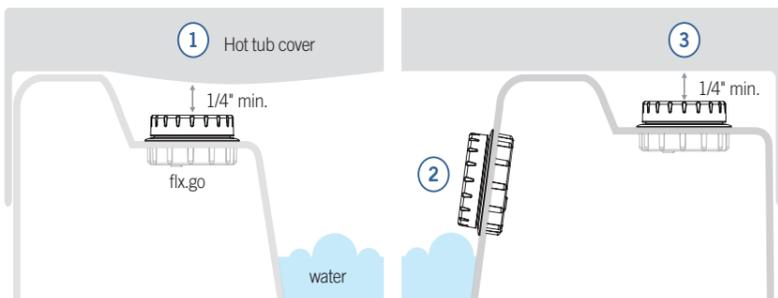
GECKO ®

flx.go

Effortless control from your hot tub seat

keypad layout

Time of day

Heating/cooling indicator arc

Error/notification indicator

13:24

25.0 °C

Turn to wake up

Temperature

Dial ring

Backlit rim

installation

① Hot tub cover

1/4" min.

flx.go

water

③

1/4" min.
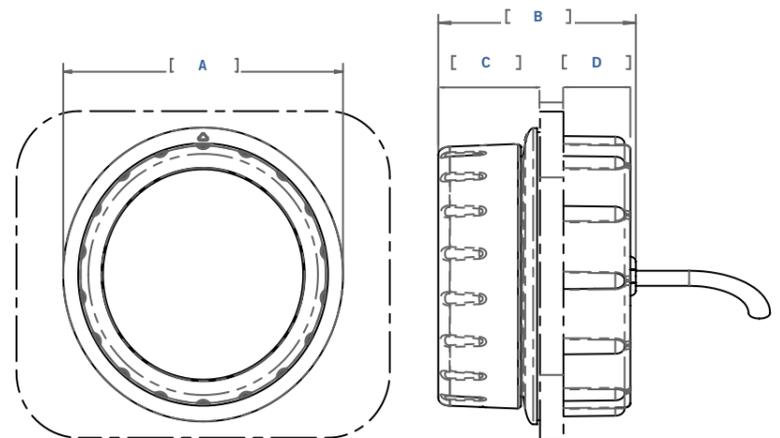
②

The flx.go can be installed facing inside the hot tub either horizontally (1) or vertically (2). When installed facing in, the flx.go must be mounted **above the water line.** It can also be installed facing out like standard keypads (3). Proper clearance (1/4" min.) needs to be planned to make sure the hot tub cover does not come into contact with the flx.go.

dimensions

[A]

[B]

[C]   [D]

A 114.3 mm (⌀ 4.498")   C 28.6 mm (1.128")
B 53.6 mm (2.110")   D 22.6 mm (0.89")

specifications

Model	Part number	Description
flx.go 10' cable	0907-005000-001	FLX.GO-00-BK-GE1
flx.go 25' cable	0907-005001-001	FLX.GO-00-BK-

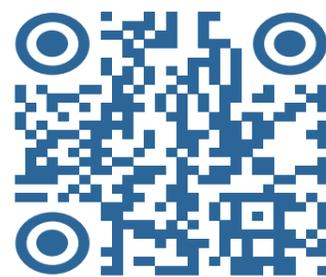| Environmental ratings	
Operating temperature:	-4°F (-20°C) to 149°F (70°C)
Storage temperature:	-22°F (-30°C) to 185°F (80°C)
Water ingress protection:	IPX5

Mechanical	
Weight:	0.7 lb (0.32 kg)
Dimensions (W x H x D):	⌀4.498" x 2.110" (⌀114.3 mm x 53.6 mm)
Standard cable length:	10' (304.8 cm)

Compatibility
in.yt, in.ye and in.yj controls systems with appropriate software revision.

more

To obtain more information about the flx.go, please refer to the QR code provided here.

https://geckoalliance.com/products/flx-go/